



Verona



SANREMO
COFFEE MACHINES

made in italy



SED VERSION

Guarantees an electronic dosing system through the button panel



SAP VERSION

Allows the semi-automatic programming of doses



TIME AND TEMPERATURE DISPLAY

only mod. SED



GROUP SR 61

Optimized to maintain the ideal coffee extraction temperature



Verona
Link to the website


Characteristics



MANUAL BOILER LOAD
Allows to bypass the electronic-level control.



ELECTRONIC AUTO-LEVEL
Through an electronic level probe the boiler is automatically filled and maintained to the right filling level.



STATIC RELAY BOILER TEMPERATURE
Allows to regulate the temperature as accurately as possible.



GLASS LEVEL
Allows to monitor the water level in the boiler.



ACTIVATED ELECTRONIC PRE-INFUSION
Management of the delayed activation of water solenoid in the first phase of brewing.



MULTIFUNCTION DISPLAY
Allows to monitor the right functioning of the machine and to program the main functions.



DOUBLE READING GAUGE
Allows to control at the same time the boiler pressure and the distribution pressure.



GROUP SR 61
Chromed brass grouphead with thermosiphonic circulation system optimized to maintain the ideal coffee extraction temperature.



EASY SERVICE
Fast access to the internal parts for quick and easy technical service.



AUTOMATIC CLEANING CYCLE
Process for coffee groups cleaning.


SANREMO

COFFEEMACHINES

Colors

	Red	RAL 3002		Silver	RAL 9006
	Matte black	RAL 9005		Pearl white	RAL 1013
	Black	RAL 9005		White	RAL 9003


Versions



32.28 inches / 820 mm

2 group SED/SAP


- 2 steam taps
- 1 water tap
- 1 one-cup portafilters
- 2 two-cup portafilters

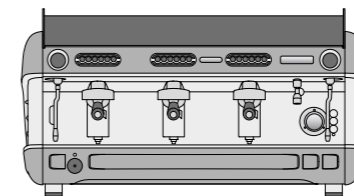

41.34 inches / 1050 mm

3 group SED/SAP

- 2 steam taps
- 1 water tap
- 1 one-cup portafilters
- 3 two-cup portafilters

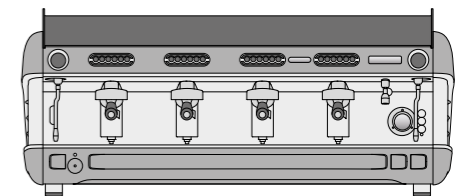


51.97 inches / 1320 mm


4 group SED/SAP

- 2 steam taps
- 1 water tap
- 1 one-cup portafilters
- 4 two-cup portafilters

23.23 inches
590 mm



24.02 inches / 610 mm



25.67 inches
652 mm

TALL VERSION

Optional



AUTOSTEAM
Steam wand characterized by an electronic system that allows to mount and/or heat milk at the set temperature.



COMPETITION FILTERS
Exclusive Sanremo design, with shape and volume designed to capture the best coffee aromas and fragrances.



EXTERNAL VOLUMETRIC PUMP



MIXED INFUSION HOT WATER FOR TEA AND HERBAL TEAS
Immediate mixing of cold / hot water for a better chemical and organoleptic quality.

Technical data

		2 group	3 group	4 group
voltage	V	220-240 1N / 380-415 3N		
power input	kW	3.15 - 3.35	5.8 - 6.05	5.8 - 6.05
steam boiler capacity	US gal / lt	3.17 / 12	5.02 / 19	5.97 / 22.6
steam boiler power	kW	2.95	5.6	5.6
pump power	kW	0.15	0.15	0.15
net weight	lb / kg	150 / 68	187 / 85	240 / 109



CUP WARMER
Dedicated resistor to keep all the cups at the optimal temperature.



NAKED PORTAFILTERS



BLUETOOTH COMMUNICATION SYSTEM



For more information about our
coffee machines please contact us
at export@sanremomachines.com



SANREMO
COFFEE MACHINES

SANREMO coffee machines s.r.l.
Via Giacomo Bortolan 52
31050 Vascon di Carbonera [TV] – ITALY
T +39 0422 448900
F +39 0422 448935
www.sanremomachines.com

Sanremo Coffee Machines s.r.l. has a certified Quality Management System
according to UNI EN ISO 9001:2015 standard.

