

# Turbovac Double Chambers

1st choice for professionals within  
the food and packaging industry



L10 - L30 - L40 - L60

# Double Chambers



**L10**



**L30**



**L40**



**L60**

## Specifications

STAINLESS STEEL COVER | FLAT WORKING SURFACE

Seal	Double	Double
Machine dimension mm	1440 x 900 x 1205	1865 x 1100 x 1170
Standard voltage	400 - 3 - 50 Hz	400 - 3 - 50 Hz
Digital Time Control	10 Programs	10 Programs
Pump Capacity	63 m3	160 m3
Average weight	425 kg	600 kg

## Options

Filler plates / Liquid filler plates	Yes	Yes
Sensor control	Sensor / H <sub>2</sub> O	Sensor / H <sub>2</sub> O
Soft Air	Soft Air	Soft Air
Seal	Trenn (pre-cut) / 1-2 / Bi-Active	Trenn (pre-cut) / 1-2 / Bi-Active
Gas	Gas	Gas
Pump upgrade	100 or 160 m3	300 m3
Voltage according to Pump upgrade	400 - 3 - 50 Hz	400 - 3 - 50 Hz

STAINLESS STEEL COVER | FLAT WORKING SURFACE









Seal	Double	Double
Machine dimension mm	2050 x 1265 x 1185	1345 x 720 x 1040
Standard voltage	400 - 3 - 50 Hz	400 - 3 - 50 Hz
Digital Time Control	10 Programs	10 Programs
Pump Capacity	160 m3	40 m3
Average weight	720 kg	280 kg

ALUMINUM COVER | CHAMBER

Filler plates / Liquid filler plates	Yes	Yes
Sensor control	Sensor / H <sub>2</sub> O	Sensor / H <sub>2</sub> O
Soft Air	Soft Air	Soft Air
Seal	Trenn (pre-cut) / 1-2 / Bi-Active	Trenn (pre-cut) / 1-2 / Bi-Active
Gas	Gas	Gas
Pump upgrade	300 m3	63 or 100 m3
Voltage according to Pump upgrade	400 - 3 - 50 Hz	400 - 3 - 50 Hz



## Seal configurations

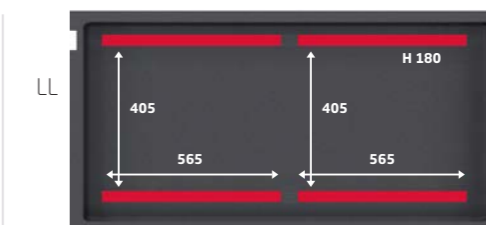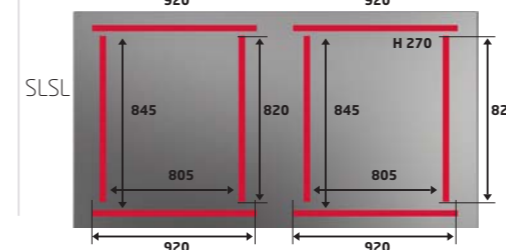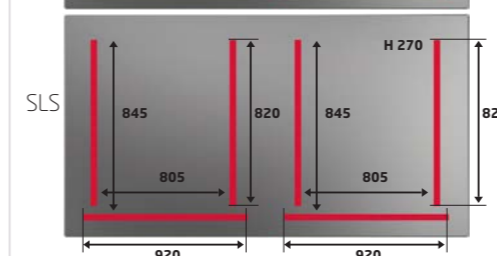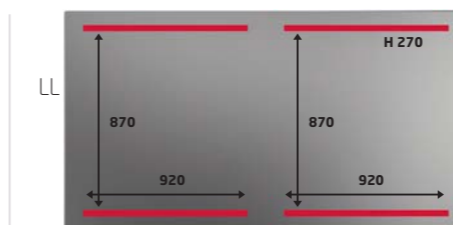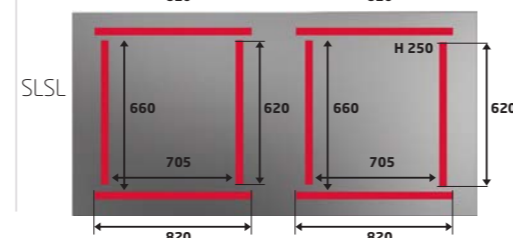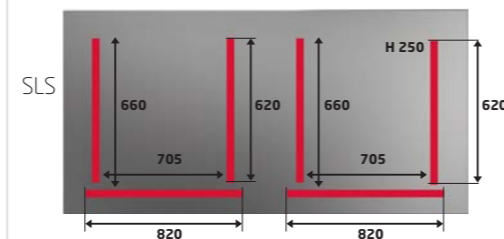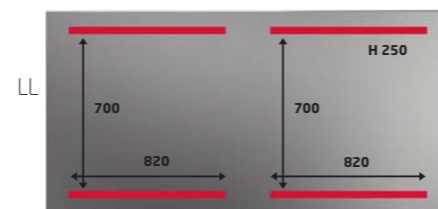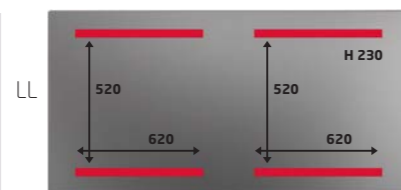

*Visit our website:*



**Turbovac**

Het Sterrenbeeld 36  
5215 ML 's-Hertogenbosch  
The Netherlands

Phone: +31 (0) 73 627 12 71

Email: [sales@Turbovac.nl](mailto:sales@Turbovac.nl)

**[www.Turbovac.nl](http://www.Turbovac.nl)**

Copyright Turbovac 2019