

AEROEVAPORATORI A SOFFITTO

doppio flusso

Ceiling unit coolers

dual air flow



RIVACOLD

Tabella / Table

(A)	RDF1250 RDF1250ED
(B)	RDF2250 RDF2250ED
(C)	RDF3250 RDF3250ED
(D)	RDF4250 RDF4250ED



(A)



(B)



(C)



(D)

Tabella / Table

(A) RDF23503
RDF23503ED
RDF23507
RDF23507ED

(B) RDF33503
RDF33503ED
RDF33507
RDF33507ED

(C) RDF43503
RDF43503ED
RDF43507
RDF43507ED

(D) RDF53503
RDF53503ED
RDF53507
RDF53507ED



(A)



(B)



(C)



(D)

Aeroevaporatori a soffitto RDF

doppio flusso

RDF Ceiling unit coolers

dual air flow

Caratteristiche generali

Gli aeroevaporatori della serie RDF sono stati ideati per essere installati in celle frigorifere per la conservazione di prodotti freschi e congelati. La caratteristica principale di questa gamma è quella di gettare aria da entrambi i lati; questo consente il posizionamento dell'evaporatore al centro della cella favorendo un ricircolo d'aria uniforme a vantaggio di un'ottima conservazione del prodotto.

La gamma RDF è disponibile con 2 differenti diametri di ventole e 3 diversi passi alette a seconda dell'applicazione richiesta.

La serie ED, fornita di resistenze di sbrinamento già montate, è adatta per essere utilizzata alle basse temperature.

General features

RDF range unit coolers have been designed to be installed inside cold rooms suited for fresh and frozen goods storage. The main feature of this range is of throwing air from both sides; this allow the unit cooler to be placed in the middle of the cold room ceiling giving a uniform air flow and, as a result, the best product conservation.

RDF range is available in two different fan diameters and three types of fin spacing according to the needed application.

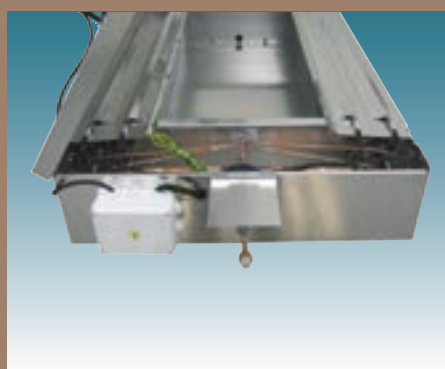
The ED version is supplied with mounted defrosting heater and is suitable for being used at low temperature applications.

Optional - Optional items

- Batteria verniciata
Varnished coil
- Resistenza per il tubo di scarico con alimentazione elettrica 220V/1/50Hz (per alimentazioni differenti contattare il nostro ufficio tecnico).
Drainage pipe heater of 220V/1/50Hz voltage (for different voltages please contact our technical dept).



Mod. RDF250.: lato collegamento frigorifero ed elettrico.
RDF250... model: pipe and electrical connection side.



Mod. RDF350.: lato collegamento frigorifero ed elettrico.
RDF350... model: pipe and electrical connection side.



Batteria

La gamma è costituita da due tipi di batterie costruite con alette in alluminio e tubo in rame: tubo da 3/8" con geometria 25x21,65 per i modelli con ventole di diametro da 250mm; tubo da 12mm con una geometria 37,5x32,5 per i modelli con ventole da 350mm.

I modelli con diametro ventole 250mm hanno una batteria con passo alette 4,5mm/9mm adatto per applicazioni di temperatura cella (Tc) da -30°C a +15°C.

I modelli con diametro ventole 350mm si suddividono a loro volta in due gruppi: modelli con passo alette da 3,5mm adatti per applicazioni di temperatura cella (Tc) da -5°C a +15°C; modelli con passo alette 7mm adatti per applicazioni di temperatura cella (Tc) da -40°C a +4°C.

Le batterie vengono collaudate con azoto ad una pressione di 25 bar.

Motoventilatori

I motoventilatori utilizzati hanno le seguenti caratteristiche:

- costruiti nel rispetto delle norme EN 60335-1, con protezione termica interna
- diametro ventola 250mm:
 - alimentazione 230-240V/1/50-60Hz
 - grado di protezione IP40
 - classe di isolamento B
 - temperatura di funzionamento da -40°C a +40°C
- diametro ventola 350mm:
 - alimentazione 230V/1/50Hz
 - doppia velocità (1050-1350 rpm)
 - grado di protezione IP44
 - classe di isolamento F
 - temperatura di funzionamento da -40°C a +35°C
- esecuzione elettrica conforme alla direttiva 2006/95/CE Bassa Tensione

Carenatura

È realizzata in alluminio. Le soluzioni costruttive adottate conferiscono robustezza alla carenatura e garantiscono l'assenza di vibrazioni durante il funzionamento. Le viti, le rondelle e i dadi sono di acciaio inossidabile.

Coil

The range consists of two types of coils, both made of aluminium fins and copper tube: 3/8" tube size with a geometry of 25x21,65 for models with 250mm fan diameter; 12mm tube size with a geometry of 37,5x32,5 for models with 350mm fan diameter.

The model types having 250mm fan diameter are fitted with a coil of 4,5mm/9mm fin spacing, suited for applications with a cold room temperature (Tc) from -30°C to +15°C.

The model types having 350mm fan diameter are made of two different groups: models with 3,5mm fin spacing suited for cold room temperature (Tc) from -5°C to +15°C; models with 7mm fin spacing suited for cold room temperature (Tc) from -40°C to +4°C.

The coils are tested with nitrogen at a pressure of 25 bar.

Fan motors

The fan motor models in use have the following features:

- manufactured following EN 60335-1 laws, with internal thermal protection
- fan diameter 250mm:
 - power supply 230-240V/1/50-60Hz
 - IP40 protection rate
 - B insulation class
 - operating temperature from -40°C to +40°C
- fan diameter 350mm:
 - power supply 230V/1/50Hz
 - double speed (1050-1350 rpm)
 - IP44 protection rate
 - F insulation class
 - operating temperature from -40°C to +35°C
- electrics made in conformity with 2006/95/CE Low Tension directive

Housing

The housing is made of aluminium. The manufacturing solutions used give the housing strength and guarantee the absence of vibrations during the functioning.

Screws, washers and nuts are made of stainless steel.





Caratteristiche tecniche

Technical features

Serie RDF / RDF Range

4,5 / 9 mm Passo alette / Fin spacing (Ø250)

Modello Model	RDF	1250 1250ED	2250 2205ED	3250 3250ED	4250 4250ED	
Capacità ΔT 10 T.cella +2°C Capacity ΔT 10 Room T. +2°C	kW	1,16	2,35	3,91	5,34	
Portata d'aria Air flow	m ³ /h	483,0	1052,0	1621,0	2161,5	
Freccia d'aria Air throw	m	3	4	8	10	
Superficie totale Total surface	m ²	3,55	8,07	12,60	17,10	
Volume circuito evaporatore Unit cooler volume circuit	dm ³	1,10	2,42	3,73	5,04	
Motoventilatori Fan motors	n x Ømm	1x250	2x250	3x250	4x250	
Assorbimento motori (*) Motor power consumption	A	0,50	1,00	1,50	2,00	
	W	60	120	180	240	
Sbrinamento elettrico (*) Electrical defrost	W	800	1650	2500	3150	
Peso netto Net weight	vers. standard standard vers.	kg	11,6	18,2	27,4	34,5
	vers. ED ED vers.	kg	12,1	19,2	28,9	36,5

(*) Alimentazione elettrica: motoventilatori 230V/1/50Hz, sbrinamento elettrico predisposto per 400V/3/50Hz
Power supply: fan motors 230/1/50Hz, electrical defrost preset for 400V/3/50Hz

Serie RDF / RDF Range

Bassa velocità / Low speed (1050 rpm)

3,5 mm Passo alette / Fin spacing (Ø350)

Modello Model	RDF	23503 23503ED	33503 33503ED	43503 43503ED	53503 53503ED	
Capacità ΔT 10 T.cella +2°C Capacity ΔT 10 Room T. +2°C	kW	6,42	8,92	12,00	14,20	
Portata d'aria Air flow	m ³ /h	3012,0	4252,5	5670,0	6866,0	
Freccia d'aria Air throw	m	8	10	11	12	
Superficie totale Total surface	m ²	27,50	39,30	51,10	62,90	
Peso netto Net weight	vers. standard standard vers.	kg	38,5	54,0	65,4	79,7
	vers. ED ED vers.	kg	41,0	57,5	69,9	85,5

Serie RDF / RDF Range

Alta velocità / High speed (1350 rpm)

3,5 mm Passo alette / Fin spacing (Ø350)

Modello Model	RDF	23503 23503ED	33503 33503ED	43503 43503ED	53503 53503ED	
Capacità ΔT 10 T.cella +2°C Capacity ΔT 10 Room T. +2°C	kW	7,67	10,64	14,24	16,88	
Portata d'aria Air flow	m ³ /h	4231,5	6192,0	8050,0	10062,5	
Freccia d'aria Air throw	m	10	11	12	14	
Superficie totale Total surface	m ²	27,50	39,30	51,10	62,90	
Peso netto Net weight	vers. standard standard vers.	kg	38,5	54,0	65,4	79,7
	vers. ED ED vers.	kg	41,0	57,5	69,9	85,5

Caratteristiche tecniche

Technical features

Serie RDF / RDF Range		Bassa velocità / Low speed (1050 rpm)				7 mm Passo alette / Fin spacing (Ø350)
Modello Model	RDF	23507 23507ED	33507 33507ED	43507 43507ED	53507 53507ED	
Capacità ΔT 10 T.cella -20°C Capacity ΔT 10 Room T. -20°C	kW	4,52	5,82	8,11	9,21	
Portata d'aria Air flow	m ³ /h	4075,5	5847,0	7796,5	9745,5	
Freccia d'aria Air throw	m	9	11	12	14	
Superficie totale Total surface	m ²	14,60	20,90	27,10	33,40	
Peso netto Net weight	vers. standard standard vers.	kg	37,9	53,1	64,3	78,3
	vers. ED ED vers.	kg	40,4	56,6	68,8	84,1

Serie RDF / RDF Range		Alta velocità / High speed (1350 rpm)				7 mm Passo alette / Fin spacing (Ø350)
Modello Model	RDF	23507 23507ED	33507 33507ED	43507 43507ED	53507 53507ED	
Capacità ΔT 10 T.cella -20°C Capacity ΔT 10 Room T. -20°C	kW	5,08	6,46	9,10	10,13	
Portata d'aria Air flow	m ³ /h	5262,5	7739,0	10112,5	12640,5	
Freccia d'aria Air throw	m	10	11	12	14	
Superficie totale Total surface	m ²	14,60	20,90	27,10	33,40	
Peso netto Net weight	vers. standard standard vers.	kg	37,9	53,1	64,3	78,3
	vers. ED ED vers.	kg	40,4	56,6	68,8	84,1

Serie RDF / RDF Range		7 / 3,5 mm Passo alette / Fin spacing (Ø350)				
Modello Model	RDF	23503 23503ED 23507 23507ED	33503 33503ED 33507 33507ED	43503 43503ED 43507 43507ED	53503 53503ED 53507 53507ED	
Volume circuito evaporatore Unit cooler volume circuit	dm ³	5,27	7,48	9,67	11,90	
Motoventilatori Fan motors	n x Ømm	2x350	3x350	4x350	5x350	
Assorbimento motori (*) Motor power consumption (1050 rpm)	A	1,24	1,86	2,48	3,10	
	W	280	420	560	700	
Assorbimento motori (*) Motor power consumption (1350 rpm)	A	1,32	1,98	2,64	3,30	
	W	300	450	600	750	
Sbrinamento elettrico (*) Electrical defrost	W	2200	3098	4080	4680	

(*) Alimentazione elettrica: motoventilatori 230V/1/50Hz, sbrinamento elettrico predisposto per 400V/3/50Hz
Power supply: fan motors 230/1/50Hz, electrical defrost preset for 400V/3/50Hz

Per una corretta scelta dell'evaporatore, utilizzare le tabelle "potenza frigorifera". Nelle tabelle vengono riportate le rese frigorifere calcolate per un range di temperatura cella (T_c) che varia in funzione del diametro ventola, del passo alette e della velocità del motoventilatore.

Per ogni passo alette si consiglia la seguente applicazione:
 passo alette 3,5 mm, utilizzo ad una $T_c \geq +2^\circ\text{C}$;
 passo alette 4,5/9 mm, utilizzo ad una $T_c \geq -30^\circ\text{C}$;
 passo alette 7 mm, utilizzo ad una $T_c \geq -40^\circ\text{C}$.

Inoltre tali rese vengono calcolate in funzione di un ΔT (differenza tra la temperatura dell'aria in entrata e la temperatura di evaporazione del refrigerante) che va da 5°C a 10°C , utilizzando come refrigerante il gas R404A.

I parametri per la scelta dell'evaporatore sono: la temperatura della cella, il valore di ΔT ed il carico termico.

Nella colonna corrispondente alla temperatura cella desiderata, scegliamo il modello che in corrispondenza del ΔT richiesto, avrà una resa uguale o superiore al carico termico.

For a correct choice of the unit cooler, use the "refrigerating output" tables. In these tables are quoted the refrigerating capacities calculated for a cold room temperature (T_c) that changes according to the fan diameter, fin spacing and the motor fan speed of the unit cooler.

For each different type of fin spacing we recommend to use the following applications:

3,5 mm fin spacing, $T_c \geq +2^\circ\text{C}$;

4,5/9 mm fin spacing, $T_c \geq -30^\circ\text{C}$;

7 mm fin spacing, $T_c \geq -40^\circ\text{C}$.

Those capacities are calculated on the base of a ΔT value (i.e. difference between the inlet air temperature and the gas evaporating temperature) from 5°C to 10°C , by using R404A gas.

The parameters valid for the unit cooler choice are the following ones: the cold room temperature, the ΔT value and the heat load.

In the column corresponding to the requested cold room temperature we will choose the model that, matching the line of the requested ΔT , will have a capacity equal or bigger than the heat load.


In caso di utilizzo di refrigeranti diversi da R404A, la resa riportata a catalogo va moltiplicata per i fattori correttivi qui sotto riportati.
In case of using a different gas from R404A, the stated refrigerating capacity is to be multiplied by the following corrective factors.

GAS	Fattore correttivo Corrective factor
R134a	0,91
R507	1
R407f mid	0,95
R407f dew	1,22
R407a mid	0,95
R407a dew	1,22

Dimensioni imballi

Packages dimensions

Codice Code	Dimensioni imballo evaporatore Evaporator package dimensions			
	A mm	B mm	H mm	Peso Weight kg
RDF1250.....	730	740	250	3,0
RDF2250.....	1130	740	250	4,0
RDF3250.....	1530	740	250	4,5
RDF4250.....	1930	870	290	13,7
RDF2350.....	1550	1010	435	13,0
RDF3350.....	2000	1010	435	20,5
RDF4350.....	2450	1010	435	22,0
RDF5350.....	2900	1010	435	23,5

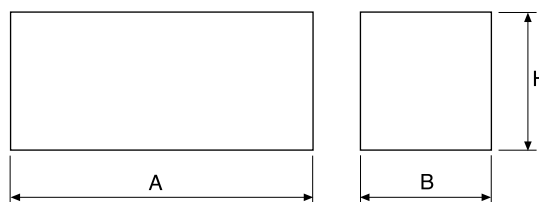

RDF1250 RDF1250ED

4,5 / 9 mm Passo alette / Fin spacing (Ø250)

	Tc	-40	-35°C	-30°C	-25°C	-20°C	-15°C	-10°C	-5°C	0°C	2°C	4°C	6°C	8°C	10°C	12°C	15°C
ΔT 10 UR/RH 76%	kW	0,73	0,81	0,87	0,93	0,96	1,00	1,03	1,08	1,15	1,16	1,17	1,19	1,20	1,22	1,25	1,30
ΔT 9 UR/RH 79%	kW	0,67	0,74	0,79	0,82	0,86	0,90	0,92	0,97	1,03	1,04	1,05	1,06	1,08	1,10	1,13	1,18
ΔT 8 UR/RH 82%	kW	0,61	0,66	0,70	0,73	0,76	0,77	0,81	0,85	0,90	0,91	0,92	0,93	0,94	0,97	0,99	1,03
ΔT 7 UR/RH 85%	kW	0,54	0,58	0,61	0,63	0,65	0,66	0,69	0,73	0,77	0,78	0,79	0,80	0,81	0,83	0,85	0,89
ΔT 6 UR/RH 89%	kW	0,46	0,49	0,50	0,52	0,54	0,55	0,58	0,61	0,65	0,66	0,67	0,68	0,69	0,71	0,73	0,77
ΔT 5 UR/RH 93%	kW	0,37	0,39	0,40	0,42	0,42	0,44	0,46	0,49	0,53	0,54	0,55	0,56	0,57	0,59	0,61	0,64

RDF2250 RDF2250ED

4,5 / 9 mm Passo alette / Fin spacing (Ø250)

	Tc	-40	-35°C	-30°C	-25°C	-20°C	-15°C	-10°C	-5°C	0°C	2°C	4°C	6°C	8°C	10°C	12°C	15°C
ΔT 10 UR/RH 76%	kW	0,79	0,94	1,13	1,34	1,53	1,73	1,89	2,08	2,28	2,35	2,40	2,46	2,51	2,60	2,69	2,83
ΔT 9 UR/RH 79%	kW	0,75	0,90	1,08	1,26	1,43	1,60	1,75	1,91	2,10	2,15	2,20	2,25	2,30	2,39	2,46	2,57
ΔT 8 UR/RH 82%	kW	0,71	0,85	1,01	1,17	1,32	1,45	1,58	1,73	1,90	1,94	1,98	2,02	2,07	2,15	2,23	2,35
ΔT 7 UR/RH 85%	kW	0,66	0,79	0,93	1,06	1,19	1,29	1,39	1,53	1,68	1,71	1,74	1,78	1,85	1,91	1,97	2,06
ΔT 6 UR/RH 89%	kW	0,61	0,72	0,83	0,94	1,04	1,11	1,21	1,32	1,45	1,47	1,50	1,53	1,60	1,66	1,72	1,81
ΔT 5 UR/RH 93%	kW	0,54	0,63	0,72	0,81	0,88	0,94	1,02	1,11	1,22	1,24	1,26	1,31	1,37	1,42	1,48	1,57

RDF3250 RDF3250ED

4,5 / 9 mm Passo alette / Fin spacing (Ø250)

	Tc	-40	-35°C	-30°C	-25°C	-20°C	-15°C	-10°C	-5°C	0°C	2°C	4°C	6°C	8°C	10°C	12°C	15°C
ΔT 10 UR/RH 76%	kW	1,69	1,97	2,29	2,60	2,85	3,06	3,30	3,55	3,84	3,91	3,99	4,05	4,12	4,22	4,36	4,57
ΔT 9 UR/RH 79%	kW	1,59	1,86	2,14	2,38	2,62	2,80	3,00	3,22	3,48	3,55	3,61	3,66	3,72	3,85	3,96	4,13
ΔT 8 UR/RH 82%	kW	1,49	1,73	1,97	2,17	2,34	2,51	2,68	2,88	3,11	3,16	3,21	3,25	3,32	3,44	3,54	3,69
ΔT 7 UR/RH 85%	kW	1,36	1,57	1,78	1,93	2,06	2,20	2,35	2,52	2,72	2,76	2,79	2,85	2,92	3,01	3,11	3,26
ΔT 6 UR/RH 89%	kW	1,22	1,39	1,54	1,67	1,77	1,89	2,01	2,16	2,35	2,39	2,44	2,49	2,54	2,63	2,72	2,86
ΔT 5 UR/RH 93%	kW	1,06	1,19	1,29	1,37	1,46	1,55	1,66	1,79	1,95	1,98	2,02	2,07	2,14	2,22	2,31	2,45

RDF4250 RDF4250ED

4,5 / 9 mm Passo alette / Fin spacing (Ø250)

	Tc	-40	-35°C	-30°C	-25°C	-20°C	-15°C	-10°C	-5°C	0°C	2°C	4°C	6°C	8°C	10°C	12°C	15°C
ΔT 10 UR/RH 76%	kW	2,56	2,94	3,36	3,75	4,09	4,35	4,58	4,88	5,25	5,34	5,43	5,51	5,59	5,71	5,90	6,19
ΔT 9 UR/RH 79%	kW	2,40	2,75	3,12	3,45	3,74	3,89	4,14	4,42	4,75	4,82	4,89	4,96	5,03	5,20	5,35	5,58
ΔT 8 UR/RH 82%	kW	2,22	2,54	2,85	3,12	3,31	3,47	3,68	3,92	4,22	4,29	4,34	4,39	4,47	4,63	4,77	4,98
ΔT 7 UR/RH 85%	kW	2,02	2,29	2,54	2,75	2,90	3,03	3,21	3,42	3,68	3,74	3,80	3,85	3,93	4,04	4,16	4,34
ΔT 6 UR/RH 89%	kW	1,79	2,01	2,20	2,36	2,44	2,58	2,73	2,91	3,16	3,23	3,26	3,32	3,40	3,51	3,63	3,81
ΔT 5 UR/RH 93%	kW	1,53	1,69	1,83	1,92	1,99	2,10	2,23	2,40	2,62	2,67	2,71	2,76	2,86	2,96	3,07	3,24

Tc = temperatura cella / cold room temperature

**R404A****Potenza frigorifera***Refrigerating output***RIVACOLD****Bassa velocità / Low speed (1050 rpm)****RDF23503 RDF23503ED**

3,5 mm Passo alette / Fin spacing (Ø350)

Tc	-5°C*	0°C*	2°C	4°C	6°C	8°C	10°C	12°C	15°C
ΔT 10 UR/RH 76% kW	6,09	6,39	6,42	6,45	6,48	6,51	6,54	6,69	6,92
ΔT 9 UR/RH 79% kW	5,39	5,66	5,70	5,73	5,77	5,80	5,84	5,92	6,04
ΔT 8 UR/RH 82% kW	4,68	4,91	4,94	4,97	5,00	5,03	5,06	5,13	5,24
ΔT 7 UR/RH 85% kW	3,88	4,07	4,09	4,12	4,14	4,17	4,19	4,25	4,34
ΔT 6 UR/RH 89% kW	3,19	3,36	3,39	3,42	3,44	3,47	3,50	3,56	3,65
ΔT 5 UR/RH 93% kW	2,50	2,65	2,68	2,71	2,75	2,78	2,81	2,87	2,96

Bassa velocità / Low speed (1050 rpm)**RDF33503 RDF33503ED**

3,5 mm Passo alette / Fin spacing (Ø350)

Tc	-5°C*	0°C*	2°C	4°C	6°C	8°C	10°C	12°C	15°C
ΔT 10 UR/RH 76% kW	8,22	8,80	8,92	9,03	9,15	9,26	9,38	9,63	10,01
ΔT 9 UR/RH 79% kW	7,41	7,93	8,04	8,14	8,25	8,35	8,46	8,63	8,89
ΔT 8 UR/RH 82% kW	6,56	6,99	7,08	7,17	7,26	7,35	7,44	7,58	7,79
ΔT 7 UR/RH 85% kW	5,65	6,01	6,08	6,16	6,23	6,31	6,38	6,50	6,68
ΔT 6 UR/RH 89% kW	4,75	5,07	5,14	5,21	5,28	5,35	5,42	5,54	5,72
ΔT 5 UR/RH 93% kW	3,82	4,09	4,16	4,23	4,30	4,37	4,44	4,55	4,72

Bassa velocità / Low speed (1050 rpm)**RDF43503 RDF43503ED**

3,5 mm Passo alette / Fin spacing (Ø350)

Tc	-5°C*	0°C*	2°C	4°C	6°C	8°C	10°C	12°C	15°C
ΔT 10 UR/RH 76% kW	11,20	11,90	12,00	12,10	12,20	12,30	12,40	12,70	13,15
ΔT 9 UR/RH 79% kW	10,00	10,60	10,70	10,80	10,90	11,00	11,10	11,30	11,60
ΔT 8 UR/RH 82% kW	8,78	9,30	9,39	9,48	9,56	9,65	9,74	9,90	10,14
ΔT 7 UR/RH 85% kW	7,49	7,91	7,98	8,05	8,13	8,20	8,27	8,41	8,62
ΔT 6 UR/RH 89% kW	6,23	6,62	6,69	6,76	6,84	6,91	6,98	7,12	7,33
ΔT 5 UR/RH 93% kW	4,96	5,28	5,36	5,44	5,51	5,59	5,67	5,80	6,00

Bassa velocità / Low speed (1050 rpm)**RDF53503 RDF53503ED**

3,5 mm Passo alette / Fin spacing (Ø350)

Tc	-5°C*	0°C*	2°C	4°C	6°C	8°C	10°C	12°C	15°C
ΔT 10 UR/RH 76% kW	13,00	14,00	14,20	14,40	14,60	14,80	15,00	15,40	16,00
ΔT 9 UR/RH 79% kW	11,80	12,60	12,80	13,00	13,20	13,40	13,60	13,90	14,35
ΔT 8 UR/RH 82% kW	10,50	11,20	11,36	11,52	11,68	11,84	12,00	12,20	12,50
ΔT 7 UR/RH 85% kW	9,04	9,65	9,78	9,91	10,04	10,17	10,30	10,50	10,80
ΔT 6 UR/RH 89% kW	7,64	8,17	8,29	8,41	8,54	8,66	8,78	8,99	9,31
ΔT 5 UR/RH 93% kW	6,16	6,63	6,75	6,87	6,98	7,10	7,22	7,42	7,72

Tc = temperatura cella / cold room temperature

(*) Per modelli passo alette 3,5 mm, si consiglia un utilizzo ad una Tc ≥ +2°C / For 3,5 mm fin spacing models we recommend to use the application Tc ≥ +2°C

Alta velocità / High speed (1350 rpm)

RDF23503 RDF23503ED

3,5 mm Passo alette / Fin spacing (Ø350)

Tc		-5°C*	0°C*	2°C	4°C	6°C	8°C	10°C	12°C	15°C
ΔT 10 UR/RH 76%	kW	7,28	7,64	7,67	7,70	7,73	7,76	7,79	7,98	8,27
ΔT 9 UR/RH 79%	kW	6,45	6,76	6,80	6,84	6,87	6,91	6,95	7,04	7,18
ΔT 8 UR/RH 82%	kW	5,59	5,85	5,88	5,91	5,94	5,97	6,00	6,07	6,18
ΔT 7 UR/RH 85%	kW	4,71	4,92	4,94	4,96	4,99	5,01	5,03	5,09	5,18
ΔT 6 UR/RH 89%	kW	3,86	4,04	4,07	4,10	4,12	4,15	4,18	4,25	4,36
ΔT 5 UR/RH 93%	kW	3,00	3,16	3,19	3,22	3,26	3,29	3,32	3,39	3,50

Alta velocità / High speed (1350 rpm)

RDF33503 RDF33503ED

3,5 mm Passo alette / Fin spacing (Ø350)

Tc		-5°C*	0°C*	2°C	4°C	6°C	8°C	10°C	12°C	15°C
ΔT 10 UR/RH 76%	kW	9,73	10,50	10,64	10,78	10,92	11,06	11,20	11,50	11,95
ΔT 9 UR/RH 79%	kW	8,81	9,45	9,58	9,71	9,84	9,97	10,10	10,30	10,60
ΔT 8 UR/RH 82%	kW	7,81	8,35	8,46	8,57	8,68	8,79	8,90	9,07	9,33
ΔT 7 UR/RH 85%	kW	6,75	7,19	7,28	7,36	7,45	7,53	7,62	7,76	7,97
ΔT 6 UR/RH 89%	kW	5,67	6,06	6,14	6,22	6,31	6,39	6,47	6,60	6,80
ΔT 5 UR/RH 93%	kW	4,56	4,87	4,95	5,03	5,11	5,19	5,27	5,40	5,60

Alta velocità / High speed (1350 rpm)

RDF43503 RDF43503ED

3,5 mm Passo alette / Fin spacing (Ø350)

Tc		-5°C*	0°C*	2°C	4°C	6°C	8°C	10°C	12°C	15°C
ΔT 10 UR/RH 76%	kW	13,30	14,10	14,24	14,38	14,52	14,66	14,80	15,20	15,80
ΔT 9 UR/RH 79%	kW	11,90	12,60	12,74	12,88	13,02	13,16	13,30	13,50	13,80
ΔT 8 UR/RH 82%	kW	10,40	11,10	11,20	11,30	11,40	11,50	11,60	11,70	11,85
ΔT 7 UR/RH 85%	kW	8,93	9,42	9,50	9,58	9,65	9,73	9,81	9,96	10,19
ΔT 6 UR/RH 89%	kW	7,42	7,84	7,92	8,00	8,08	8,16	8,24	8,39	8,62
ΔT 5 UR/RH 93%	kW	5,87	6,24	6,32	6,40	6,49	6,57	6,65	6,79	7,00

Alta velocità / High speed (1350 rpm)

RDF53503 RDF53503ED

3,5 mm Passo alette / Fin spacing (Ø350)

Tc		-5°C*	0°C*	2°C	4°C	6°C	8°C	10°C	12°C	15°C
ΔT 10 UR/RH 76%	kW	15,30	16,60	16,88	17,16	17,44	17,72	18,00	18,40	19,00
ΔT 9 UR/RH 79%	kW	13,90	15,00	15,26	15,52	15,78	16,04	16,30	16,60	17,05
ΔT 8 UR/RH 82%	kW	12,40	13,30	13,50	13,70	13,90	14,10	14,30	14,60	15,05
ΔT 7 UR/RH 85%	kW	10,80	11,50	11,66	11,82	11,98	12,14	12,30	12,60	13,05
ΔT 6 UR/RH 89%	kW	9,11	9,76	9,91	10,06	10,20	10,35	10,50	10,70	11,00
ΔT 5 UR/RH 93%	kW	7,36	7,90	8,04	8,18	8,31	8,45	8,59	8,82	9,17

Tc = temperatura cella / cold room temperature

(*) Per modelli passo alette 3,5 mm, si consiglia un utilizzo ad una Tc ≥ +2°C / For 3,5 mm fin spacing models we recommend to use the application Tc ≥ +2°C

**R404A****Potenza frigorifera***Refrigerating output***RIVACOLD****Bassa velocità / Low speed (1050 rpm)****RDF23507 RDF23507ED**

7 mm Passo alette / Fin spacing (Ø350)

Tc		-40°C	-35°C	-30°C	-25°C	-20°C	-15°C	-10°C	-5°C	0°C	2°C	4°C
ΔT 10 UR/RH 76%	kW	3,35	3,72	4,08	4,30	4,52	4,74	4,96	5,16	5,39	5,41	5,43
ΔT 9 UR/RH 79%	kW	3,07	3,39	3,69	3,87	4,04	4,22	4,39	4,56	4,77	4,80	4,82
ΔT 8 UR/RH 82%	kW	2,76	3,03	3,23	3,37	3,52	3,66	3,80	3,96	4,13	4,15	4,17
ΔT 7 UR/RH 85%	kW	2,43	2,60	2,78	2,89	3,00	3,10	3,21	3,33	3,48	3,50	3,52
ΔT 6 UR/RH 89%	kW	2,04	2,18	2,30	2,38	2,47	2,55	2,63	2,74	2,88	2,90	2,93
ΔT 5 UR/RH 93%	kW	1,63	1,72	1,80	1,86	1,93	1,99	2,05	2,15	2,27	2,30	2,33

Bassa velocità / Low speed (1050 rpm)**RDF33507 RDF33507ED**

7 mm Passo alette / Fin spacing (Ø350)

Tc		-40°C	-35°C	-30°C	-25°C	-20°C	-15°C	-10°C	-5°C	0°C	2°C	4°C
ΔT 10 UR/RH 76%	kW	3,59	4,17	4,83	5,33	5,82	6,32	6,81	7,23	7,67	7,74	7,82
ΔT 9 UR/RH 79%	kW	3,36	3,90	4,48	4,89	5,31	5,72	6,13	6,49	6,87	6,94	7,02
ΔT 8 UR/RH 82%	kW	3,11	3,59	4,08	4,41	4,74	5,07	5,40	5,70	6,04	6,10	6,16
ΔT 7 UR/RH 85%	kW	2,82	3,23	3,62	3,88	4,14	4,39	4,65	4,90	5,18	5,23	5,28
ΔT 6 UR/RH 89%	kW	2,48	2,82	3,11	3,30	3,50	3,69	3,88	4,10	4,35	4,40	4,46
ΔT 5 UR/RH 93%	kW	2,10	2,33	2,52	2,67	2,82	2,96	3,11	3,29	3,51	3,57	3,62

Bassa velocità / Low speed (1050 rpm)**RDF43507 RDF43507ED**

7 mm Passo alette / Fin spacing (Ø350)

Tc		-40°C	-35°C	-30°C	-25°C	-20°C	-15°C	-10°C	-5°C	0°C	2°C	4°C
ΔT 10 UR/RH 76%	kW	5,39	6,16	6,97	7,54	8,11	8,67	9,24	9,71	10,20	10,28	10,36
ΔT 9 UR/RH 79%	kW	5,01	5,70	6,40	6,86	7,33	7,79	8,25	8,66	9,11	9,18	9,25
ΔT 8 UR/RH 82%	kW	4,58	5,18	5,76	6,13	6,49	6,86	7,22	7,56	7,96	8,02	8,08
ΔT 7 UR/RH 85%	kW	4,10	4,59	5,04	5,32	5,60	5,87	6,15	6,44	6,77	6,82	6,87
ΔT 6 UR/RH 89%	kW	3,56	3,93	4,22	4,44	4,66	4,88	5,10	5,34	5,65	5,71	5,77
ΔT 5 UR/RH 93%	kW	2,94	3,20	3,38	3,54	3,71	3,87	4,03	4,24	4,51	4,57	4,63

Bassa velocità / Low speed (1050 rpm)**RDF53507 RDF53507ED**

7 mm Passo alette / Fin spacing (Ø350)

Tc		-40°C	-35°C	-30°C	-25°C	-20°C	-15°C	-10°C	-5°C	0°C	2°C	4°C
ΔT 10 UR/RH 76%	kW	5,42	6,35	7,41	8,31	9,21	10,10	11,00	11,70	12,40	12,54	12,68
ΔT 9 UR/RH 79%	kW	5,08	5,95	6,90	7,65	8,40	9,14	9,89	10,50	11,20	11,34	11,48
ΔT 8 UR/RH 82%	kW	4,73	5,51	6,30	6,91	7,53	8,14	8,75	9,28	9,86	9,97	10,08
ΔT 7 UR/RH 85%	kW	4,31	4,98	5,63	6,11	6,59	7,07	7,55	7,99	8,47	8,56	8,66
ΔT 6 UR/RH 89%	kW	3,81	4,35	4,87	5,24	5,61	5,97	6,34	6,72	7,15	7,24	7,34
ΔT 5 UR/RH 93%	kW	3,24	3,65	4,01	4,28	4,56	4,83	5,10	5,40	5,79	5,89	5,98

Tc = temperatura cella / cold room temperature

Alta velocità / High speed (1350 rpm)

RDF23507 RDF23507ED

7 mm Passo alette / Fin spacing (Ø350)

Tc		-40°C	-35°C	-30°C	-25°C	-20°C	-15°C	-10°C	-5°C	0°C	2°C	4°C
ΔT 10 UR/RH 76%	kW	3,60	4,04	4,48	4,78	5,08	5,38	5,68	5,92	6,18	6,19	6,20
ΔT 9 UR/RH 79%	kW	3,31	3,69	4,07	4,31	4,55	4,79	5,03	5,23	5,46	5,48	5,51
ΔT 8 UR/RH 82%	kW	2,99	3,31	3,62	3,81	3,99	4,18	4,36	4,52	4,72	4,74	4,76
ΔT 7 UR/RH 85%	kW	2,64	2,89	3,11	3,24	3,38	3,51	3,64	3,77	3,94	3,95	3,97
ΔT 6 UR/RH 89%	kW	2,24	2,43	2,59	2,69	2,78	2,88	2,97	3,09	3,24	3,26	3,28
ΔT 5 UR/RH 93%	kW	1,81	1,93	2,03	2,10	2,17	2,24	2,31	2,41	2,55	2,58	2,61

Alta velocità / High speed (1350 rpm)

RDF33507 RDF33507ED

7 mm Passo alette / Fin spacing (Ø350)

Tc		-40°C	-35°C	-30°C	-25°C	-20°C	-15°C	-10°C	-5°C	0°C	2°C	4°C
ΔT 10 UR/RH 76%	kW	3,74	4,42	5,18	5,82	6,46	7,10	7,74	8,26	8,78	8,87	8,96
ΔT 9 UR/RH 79%	kW	3,52	4,15	4,83	5,37	5,91	6,44	6,98	7,42	7,87	7,96	8,04
ΔT 8 UR/RH 82%	kW	3,27	3,82	4,40	4,84	5,29	5,73	6,17	6,54	6,92	6,99	7,06
ΔT 7 UR/RH 85%	kW	2,98	3,45	3,93	4,28	4,63	4,97	5,32	5,61	5,94	6,00	6,05
ΔT 6 UR/RH 89%	kW	2,63	3,02	3,40	3,66	3,93	4,19	4,45	4,70	4,99	5,05	5,11
ΔT 5 UR/RH 93%	kW	2,23	2,43	2,79	2,98	3,18	3,37	3,56	3,76	4,01	4,07	4,13

Alta velocità / High speed (1350 rpm)

RDF43507 RDF43507ED

7 mm Passo alette / Fin spacing (Ø350)

Tc		-40°C	-35°C	-30°C	-25°C	-20°C	-15°C	-10°C	-5°C	0°C	2°C	4°C
ΔT 10 UR/RH 76%	kW	5,72	6,60	7,59	8,34	9,10	9,85	10,60	11,10	11,70	11,76	11,82
ΔT 9 UR/RH 79%	kW	5,33	6,14	7,00	7,60	8,19	8,79	9,38	9,88	10,40	10,48	10,56
ΔT 8 UR/RH 82%	kW	4,91	5,62	6,33	6,81	7,28	7,76	8,23	8,63	9,07	9,13	9,20
ΔT 7 UR/RH 85%	kW	4,42	5,01	5,57	5,93	6,29	6,65	7,01	7,34	7,71	7,76	7,81
ΔT 6 UR/RH 89%	kW	3,85	4,32	4,73	5,00	5,28	5,55	5,82	6,09	6,42	6,48	6,54
ΔT 5 UR/RH 93%	kW	3,20	3,53	3,81	4,00	4,20	4,39	4,58	4,81	5,11	5,18	5,24

Alta velocità / High speed (1350 rpm)

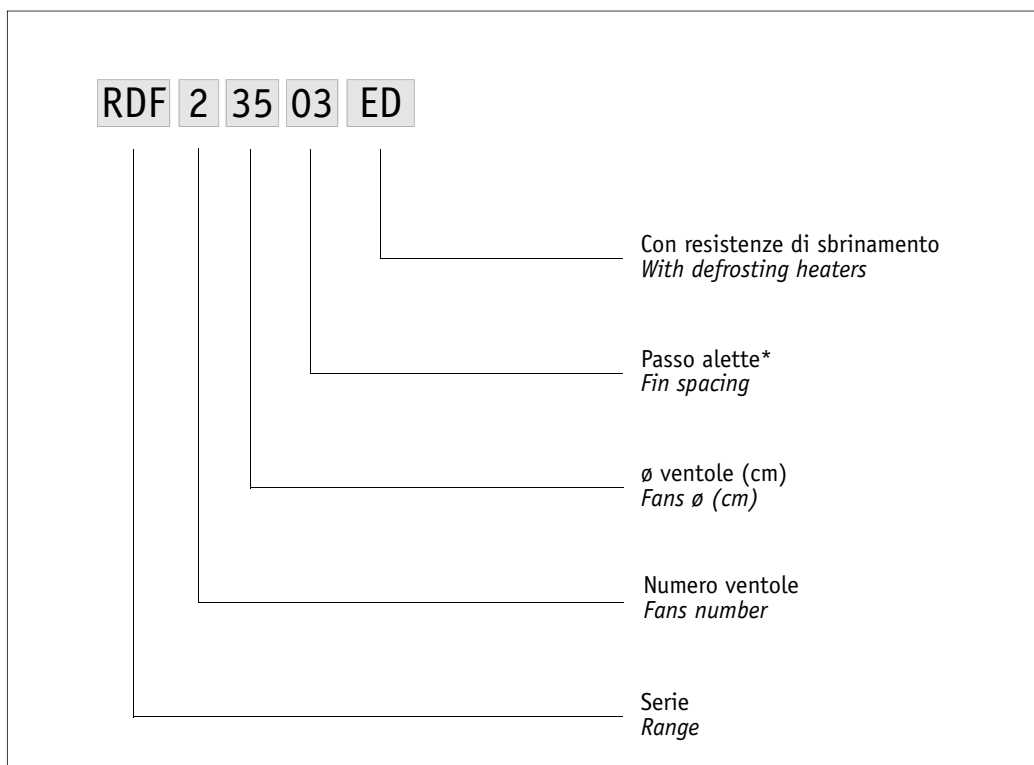
RDF53507 RDF53507ED

7 mm Passo alette / Fin spacing (Ø350)

Tc		-40°C	-35°C	-30°C	-25°C	-20°C	-15°C	-10°C	-5°C	0°C	2°C	4°C
ΔT 10 UR/RH 76%	kW	5,66	6,73	7,96	9,05	10,13	11,22	12,30	13,20	14,10	14,26	14,42
ΔT 9 UR/RH 79%	kW	5,34	6,35	7,45	8,36	9,28	10,19	11,10	11,90	12,60	12,76	12,92
ΔT 8 UR/RH 82%	kW	4,99	5,90	6,86	7,61	8,36	9,10	9,85	10,50	11,10	11,24	11,38
ΔT 7 UR/RH 85%	kW	4,57	5,35	6,16	6,75	7,35	7,94	8,53	9,04	9,59	9,69	9,79
ΔT 6 UR/RH 89%	kW	4,07	4,73	5,36	5,82	6,27	6,73	7,18	7,61	8,09	8,19	8,29
ΔT 5 UR/RH 93%	kW	3,48	3,99	4,45	4,78	5,11	5,44	5,77	6,12	6,54	6,64	6,74

Tc = temperatura cella / cold room temperature

LETTURA CODICE / MODEL DESIGNATION



- * Per i modelli con ventola 250mm il passo alette non viene indicato nel codice perchè sempre uguale per tutti i modelli (4,5/9mm)
For models having 250mm Ø fan, the fin spacing is not mentioned in the code as it is the same for all models (4,5/9mm)















Per ulteriori informazioni, contattare il nostro ufficio tecnico / *For further information, please contact our technical dept*

Descrizione, dati tecnici e illustrazioni sono indicativi e non vincolanti. La Rivacold si riserva il diritto di modificare per intero o in parte le specifiche descritte nella presente documentazione senza preavviso e a beneficio della continuità produttiva, di utilizzare produttori alternativi di componenti previsti nel progetto.

Descriptions, technical data and pictures are to be considered as a guide and not binding. Rivacold reserves the right to change in whole or part, the specification detailed in this documentation without prior notice and, when necessary to achieve continuous productions, to use alternative manufactures of components for design accomplishment.

Aeroevaporatori Rivacold

Rivacold units coolers

Serie Range	Potenza / Capacity										Ventole Fans	
	1000W	2000W	4000W	8000W	16000W	32000W	64000W	128000W	256000W			
RM	132 W											2
RS	107 - 2760 W											1 - 4
RSV	341 - 3080 W											1 - 2
RSI 250	420 - 5380 W											1 - 4
RSI 350		1440 - 11900 W										2 - 4
RC	538 - 8005 W											1 - 4
RCS	383 - 8465 W											1 - 4
RCMR 350		1670 - 23150 W										1 - 4
RCMR 450			3760 - 60900 W									1 - 4
RDF 250	374 - 6185 W											1 - 4
RDF 350		1630 - 19000 W										2 - 5
RDFR 500			3020 - 82050 W									1 - 4
RCBR 500			4020 - 73750 W									1 - 4
RCBR 630			4588 - 170569 W									1 - 4



NOTES

A series of ten horizontal light blue bars stacked vertically, intended for writing notes.

NOTES

A series of ten horizontal light blue bars stacked vertically, intended for writing notes.



NOTES

A series of ten horizontal light blue bars stacked vertically, providing space for handwritten notes.

RIVACOLD s.r.l.

Costruzione Gruppi Frigoriferi e Accessori

Via Sicilia, 7 - Fraz. Montecchio

61022 Vallefoglia (PU) - Italy

Tel. +39.0721.919911 - Fax +39.0721.490015

www.rivacold.com / info@rivacold.com

A member of **RIVACOLD GROUP** 



CERT F CATE No 50 100 1479