


A: Please follow the instructions, properly install and place the equipment, connect the water supply pipe, drain pipe, and reserve additional space 10cm at the installation site to meet the installation requirements. (Air cooling equipment needs more space to meet the air flow and heat discharge.)  
 B: The cooling effect depends on the heat dissipation environment, please keep ventilation  
 C: Optional 6/10/15cm adjustable legs.

A: 请按照说明书，正确安装。摆放设备供水、排水管。在安装现场预留10厘米的空隙，以满足安装要求（风冷设备，需要更多的空间，以满足空气流通和热量排出）。

B: 制冷效果取决于散热环境，请保持通风。  
 C: 可选择6厘米10厘米15厘米高低脚。

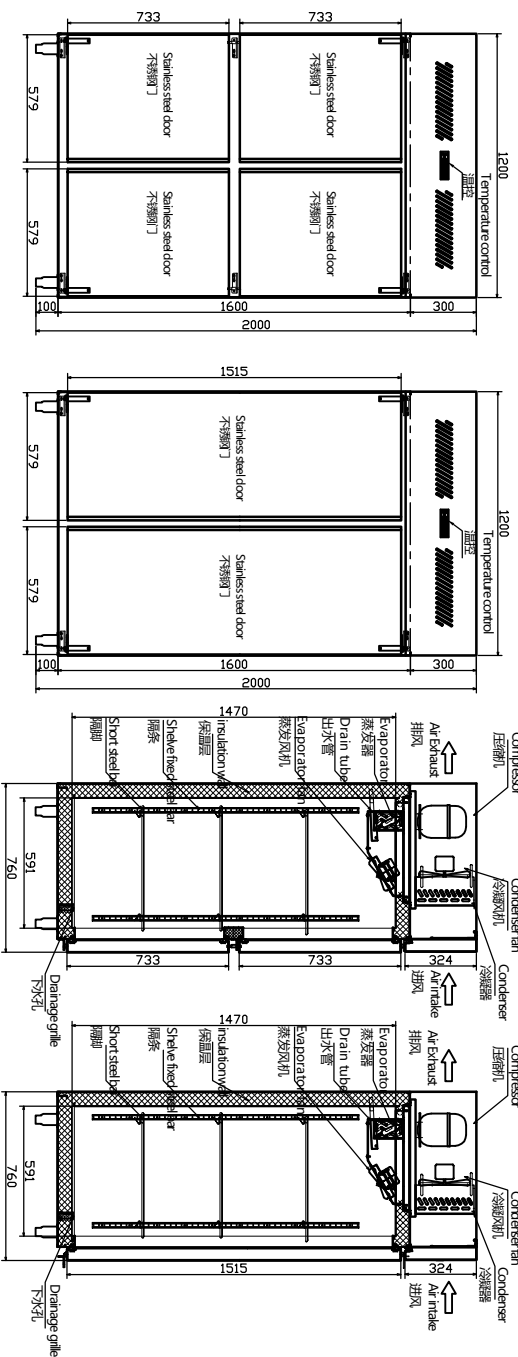

|                                     |   |
|-------------------------------------|---|
| Item 名称                             | 1.2m air cooling upright refrigerator                       |
| Model 型号                            | SRCP-120/SFCP-120   |
| Dimension 外形尺寸                      | 1200*760*2000   |
| Voltage 电源                          | 220V/50Hz   |
| Power 额定功率                          | 410/750W  |
| Temperature Range 温度                | -6℃~+15/-18~-22℃  |
| Cooling Type 制冷方式                   | Air cooling 风冷  |
| Capacity 容积                         | 845L  |
| Material 材质                         | Interior内胆: 201<br>Cabinet箱体: 201                           |
| Refrigerant Type 制冷剂类型              | R134a/R404a   |
| Refrigerant Throttling Mode 制冷剂节流方式 | Capillary 毛细管   |
| Keep Temp Material 保温材料             | Cyclopentane 环戊烷  |
| Defrost Water 化霜水                   | External drain tube/外接排水管                                   |
| Compressor Type 压缩机类型               | Enclosed unit 全封闭式  |
| Condensing System 冷凝器类型             | Forced air cooling 强制风冷                                     |
| Evaporating Fan 蒸发器风机               | Hood Motor 220V 罩极电机220v                                    |
| Temperature Controller 温控           | Pc board 电脑板  |
| Defrost Time 除霜时间                   | Every four hour 每隔4小时一次                                     |
| Compressor work temp 压缩机启动温度        | 4℃  |
| Compressor protection type 压缩机保护方式  | High temperature protection 高压保护                            |
| Wattage safety type 电源保护方式          | Voltage changer/transformer 变压器                             |
| Heat Dissipation Type 散热方式          | Front Air inlet and back venting refrigeration system 前吸后排风 |
| Shelves 隔板                          | Six layers shelves 六层                                       |
| Light 灯光                            | According to the order 按照订单                                 |
| Condensing Unit 机组                  | Self-Contained 一体机  |
| Electrical Protection 电源保护方式        | 6.3a Fuse Wire 6.3a 保险丝                                     |
| Insulation Layer Thickness 保温层厚度    | Cabinet 65mm 箱体65mm; Door 55mm 门55mm                        |
| Using Temp 使用温度                     | 1~-43℃  |
| Packing Size 包装尺寸                   | /   |
| N.W./G.W./净重/毛重                     | /   |

Approved by European CE and CB  
 已通过CE、CB认证。

# HISAKAGE

1.2m air cooling upright refrigerator 1.2米风冷立式冰箱

SRCP-120/SFCP-120 视图方向 View Orientation

|                    |               |                  |                |     |
|--------------------|---------------|------------------|----------------|-----|
| Over Look View 俯视图 | Rear View 后视图 | Revise Date 修订日期 | Make Date 制图日期 | REV |
| Front View 正视图     | Side View 侧视图 | 2019-1-17        | 2018-10-8      | A   |

Remark: Product update and modify, there are different between original product and picture, pictures only for reference, the right of final interpretation belong to Hisakage. 备注: 产品改型升级, 实物与图面有差异, 图片仅供参考, 最终解释权归Hisakage所有。