

SMI80

85 kg Self-contained Mojo

SIMAG

Other models in this range: SNM300 - SNM500

Technical Features

- Electronic control
- Stainless steel bodywork - scotch brite
- Air or water cooled
- Direct transmission
- Easily accessible components
- Low power and water consumption
- Reduced dimensions
- Continuous production
- Refrigerant R404A

24 Hour Ice Production - 10°C/10° C

Air Cooled 85 kg

Water Cooled 85 kg

Bin Capacity

kg 25

Warranty

2 years warranty on components

Voltage

230/50/1 standard version

220-240/60/1 version available on demand




Technology and Certifications



Certified ISO 9001:2008
TOTAL QUALITY



Residual water content 8%



MILANO OFFICE
Sales Dept.
Tel. +39 02 93900215
e-mail: sales@simag.it
Service Dept.
Tel. +39 02 93960357
e-mail: service@simag.it

SIMAG FAR EAST
Singapore Office
Tel. ++65 6738 5393
e-mail: scotsman@scotsman.com.sg


www.simag.it

SMI80

85 kg Self-contained Mojo



Other models in this range: SNM300 - SNM500

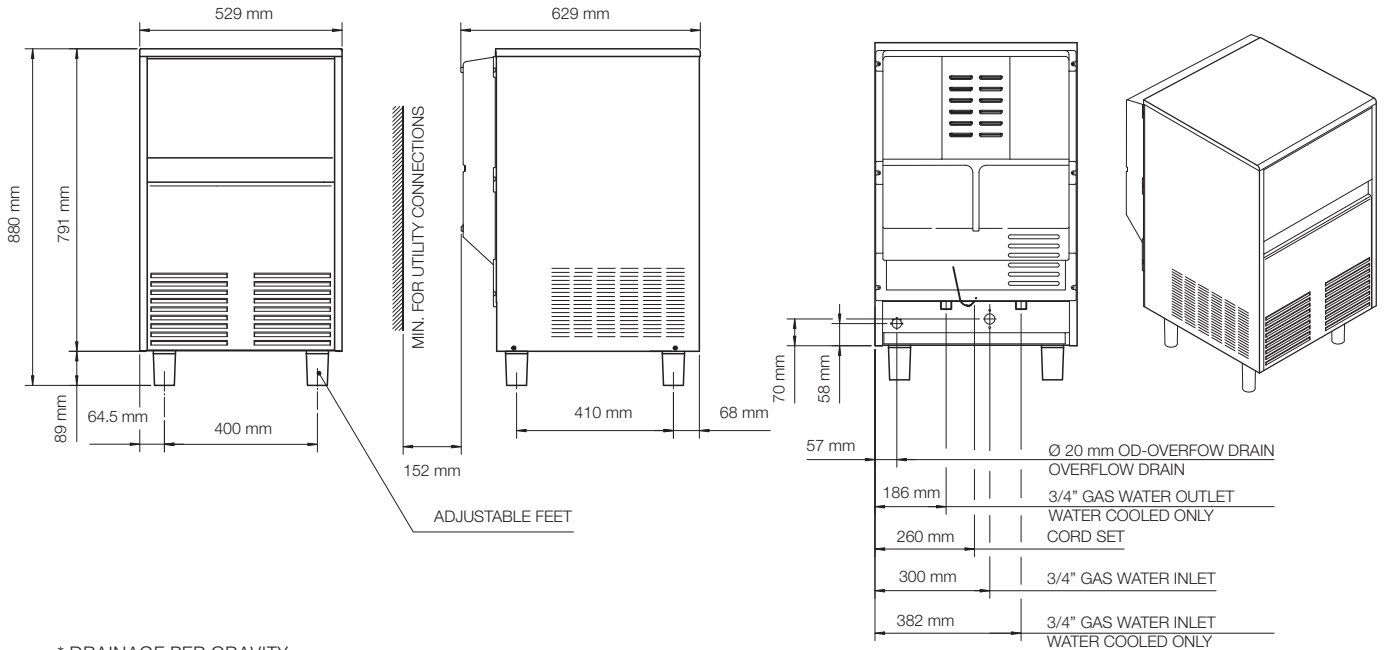

* DRAINAGE PER GRAVITY

Operating Limits

	Minimum	Maximum
Air Temperatures	10°C	43°C
Water Temperatures	5°C	38°C
Electrical Voltage	-10%	+10%
Water Pressure	14 psi 1 bar	70 psi 5 bar

Specifications and design are subject to change without notice

	Voltage	Power Input Watt (*)	Refrigerant	Refrigerant charge kg	Fuse Amp	Water Consumption l/h (**)	Net Weight kg	Shipping Weight kg
SMI 80 AS	230/50/1	440	R404A	0,43	10	2.7	51	59
SMI 80 AS	220-240/60/1	n.a.	R404A	n.a.	10	n.a.	51	59.
SMI 80 WS	230/50/1	350	R404A	0,42	10	56	51	59
SMI 80 WS	220-240/60/1	n.a.	R404A	n.a.	10	n.a.	51	59

(*) Power Input: at 43°C Ambient Temperature

(**) Water Consumption: at 32°C Air and 21°C Water